



The Roshni Low Profile (RoLP) is the fire alarm markets leading conventional sounder, although it finds uses in many applications, such as security, general signalling and process alarms.

With its recognisable body, wide operating voltage and international reputation for quality, the RoLP is a flexible sounder suitable for use in most applications.


Features

- 102dB(A) sound output
- 32 tones (user selectable)
- Two stage alarm
- Automatic synchronisation

Benefits

- Ideal for general signalling and Fire use
- Fire approved and general signalling tone options
- Alert and alarm function
- Improved tone clarity, reducing confusion

Dimensions

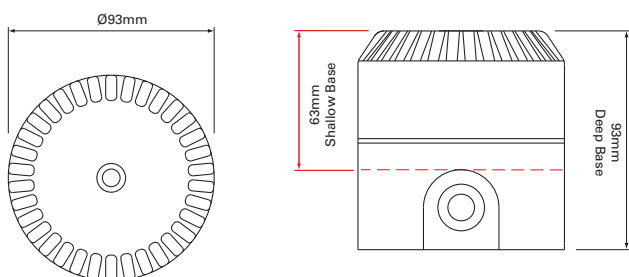

Technical Specification

| | |
|---------------------|---------------------------|
| Voltage | 9-15Vdc 18-28Vdc |
| Current | 12mA (Typical Tone 3) |
| Sound Output | 102dB(A) (Typical Tone 3) |
| Tones | 32 |
| Volume | Control 10dB |
| Monitoring | Reverse polarity |
| Temperature | - 25°C to + 70°C |
| Protection | IP54 (s)* IP65 (d)* |
| Construction | ABS |
| Weight | 0.25Kg |
| Colours | Red or white |

(s)* Shallow Base
(d)* Deep / U Base

RoLP White



Catalogue Numbers

| Reference | Cat No | Description |
|-------------|------------------|--------------------------------|
| ROLP/SV/R/S | 540501FULL-0389X | RoLP, Shallow Base, Red Body |
| ROLP/SV/W/S | 540502FULL-0406X | RoLP, Shallow Base, White Body |
| ROLP/SV/R/D | 540503FULL-0403X | RoLP, Deep Base, Red Body |
| ROLP/SV/W/D | 540504FULL-0410X | RoLP, Deep Base, White Body |
| ROLP/SV/R/U | 540505FULL-0390X | RoLP, U - Base, Red Body |
| ROLP/SV/W/U | 540506FULL-0441X | RoLP, U - Base, White Body |

